



Feidhmeannacht na Seirbhíse Sláinte
Health Service Executive

Office of the Clinical Lead
Antimicrobial Resistance and Infection Control Team
Office of the Chief Clinical Officer
HSE
Merlin Park Hospital
Galway
H91 N973

[hse.ie/hcai](https://www.hse.ie/hcai)

27th March 2023

Dear Colleagues

We have been notified of an extension to the shelf life of a Coverall product currently available from HSE via the National PPE Supply Chain, namely "Alphashield Coverall".

The new expiry date is 09/05/2030. This extension is based on confirmation from the manufacturer that the shelf life is 10 years as per the Safety Data sheet and provided that they are being stored under correct conditions and ambient room temperatures. We are also advised that these products continue to meet current regulatory requirements for these products.

This information will be made available via www.hse.ie.

For procurement related queries for these or other products please contact:
Covid19.procurement@hse.ie

Regards,

Handwritten signature of Dr. Eimear Brannigan in black ink.

Dr. Eimear Brannigan,
Clinical Lead,
AMRIC

Handwritten signature of Martin Quinlivan in blue ink.

Martin Quinlivan,
National PPE Team
HSE Procurement

ALPHASHIELD S2200



LIMITED LIFE COVERALL

TECHNICAL SPECIFICATIONS

PHYSICAL PERFORMANCE	
	EN Class*
EN 550 Abrasion	3 of 6
EN ISO 7254 Flex Cracking	3 of 6
EN ISO 9073-4 Tear Resistance	2 of 6
EN ISO 13934-1 Tensile Strength	3 of 6
EN 863 Puncture Resistance	3 of 6
EN 25978 Resistance to blocking	Pass


* EN Class specified by EN14325: 2004. The higher the class number the better the performance.

WHOLE SUIT PERFORMANCE		
Type 5 Particle Test	EN ISO 13982-1:2004+A1:2009 20 Q/Lm, 20% and 10% and 10% and 10% and 10%	Pass
Type 6 Reduced Spray Test	EN 13982-1:2004+A1:2009	Pass
Radioactive Particulates	EN 1073-2 TIL = 2% NPF = 3%	Pass Class 1
Electrostatic Properties	EN 1149-5:2008	Pass
Seam Strength	EN ISO 13934-2	Class 4 of 6


EN ISO 6530 RESISTANCE TO PENETRATION OF CHEMICALS		
	Repeatability (EN Class)	Penetration (EN Class)
Sulphuric Acid (30%)	3 of 3	3 of 3
Sodium Hydroxide (10%)	3 of 3	3 of 3
o-Xylene	2 of 3	3 of 3
Butan-1-ol	3 of 3	3 of 3

EN14126: 2003 FABRIC BARRIER TO INFECTED AGENTS	
ISO 15603 - resistance to penetration by blood/body fluids with synthetic blood	Class 6 of 6
ISO 16604 - resistance to blood borne pathogens using Phi-X174 bacteriophage	Class 6 of 6
EN ISO 22610 - resistance to penetration by wet liquid - staphylococcus aureus	Class 6 of 6
ISO/DIS 22611 - resistance to penetration by aerosols -	Class 3 of 3
ISO 22612 - resistance to dry particles contaminated with bacillus subtilis spores	Class 3 of 3

SIZING Body Measurements

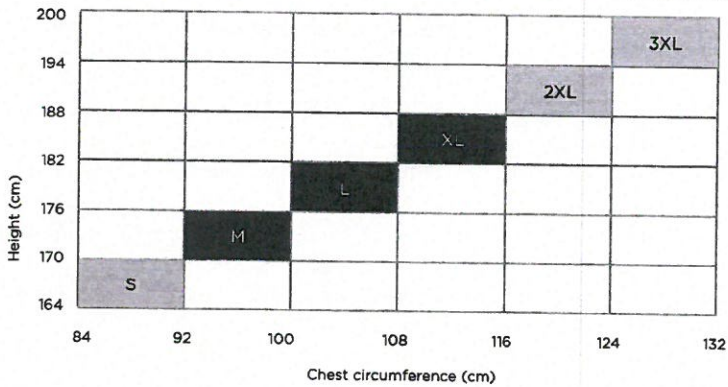

CERTIFICATION

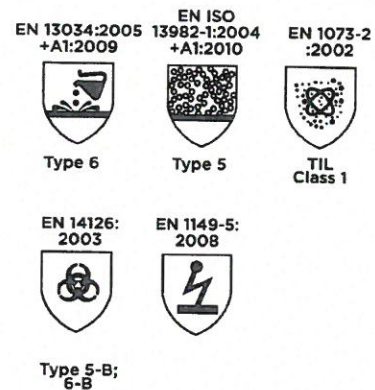

STORAGE AND MAINTENANCE

Alphashield S2200 is manufactured from materials made from polypropylene and polyethylene. These inert polymers are proven not to degraded within 10 years. Therefore a product shelf life of 10 years should be reasonable in correct storage conditions. It is advised to keep products stored in cool, dry areas where possible and away from direct heat and sunlight.

ALPHA-DATA-ASS2200-0118_2

www.alphasolway.com T: +44 (0)1461 202452 E: sales@alphasolway.com

ALPHA SOLWAY LTD, Factory 1, Queensberry Street, Annan, DG12 5BL, UK

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary. © 2018 Alpha Solway Ltd

ALPHA
SOLWAY

ALPHASHIELD S2200



LIMITED LIFE COVERALL

Alphashield S2200 is a limited life coverall with bound seam made from polypropylene and polyethylene. It is designed to protect workers from hazardous substances or sensitive products and processes from contamination.

FEATURES

- Lightweight microporous polyethylene (PE) laminate
- Bound seam for additional protection and strength
- 2-way front zipper with re-sealable storm flap
- Thumb loop ensures arm protection remains in place when arm is raised
- Elasticated waist to enhance fit
- Innovative, three piece elasticated hood construction provides added comfort, durability and fit
- Elasticated ankles and wrists



ORDERING INFORMATION

Part Number:

S2200

SUITABLE APPLICATIONS

Protection against particulate hazards (Type 5) and or limited liquid splashes or sprays (Type 6) depending on the chemical toxicity and exposure conditions

- Agriculture
- Biological Hazards
- Chemical Handling
- Clean Room
- Electronics
- Hazardous Material Handling
- Paint Spraying
- Printing